

# HARMONY FIRST MILE 200



## FLEXIBLE EVOLUTIONARY SWITCH

### THE HARMONY FIRST MILE 200 DELIVERS BOTH PERFORMANCE AND VALUE IN A FLEXIBLE PERIPHERAL SWITCH.

Part of the Harmony microwave solution, this reliable switch is optimized for tail and chain sites where 3G and LTE base stations are co-located with 2G base stations. This system also aggregates TDM and packet traffic locally.


The Harmony First Mile 200 delivers 8 Gbps switching capacity, combined with E-LINE and E-LAN services, advanced QoS mechanisms, performance monitoring, fault detection and robust clock recovery.

With its extended operating temperature range and compact size, the Harmony First Mile 200 can be deployed within an outdoor base station housing or within its own enclosure, providing zero-footprint site installation.

The Harmony First Mile 200's access interfaces, which can be used to power the Harmony Radio, include Fast and Gigabit Ethernet and E1/T1.

### SOLUTION HIGHLIGHTS

- 802.1ad provider bridging and 802.1Q bridging
- E-LINE and E-LAN services with MEF9 and MEF14 certification
- Advanced QoS with 8 priority queues, policing, shaping and simple random early detection (sRED)
- Ethernet OAM: 802.1ag and ITU-T Y.1731
- Advanced clock synchronization with Synchronous Ethernet and Differential Clock Recovery
- Low power consumption (min. 15W)
- Power-plus-Ethernet support for Harmony Radio
- RSTP/MSTP, G.8031, G.8032 network protection
- CES Linear Protection
- 8 x E1/T1 TDM ports
- 4 x 10/100/1000 Base-TX and 2 x SFP Ethernet Ports

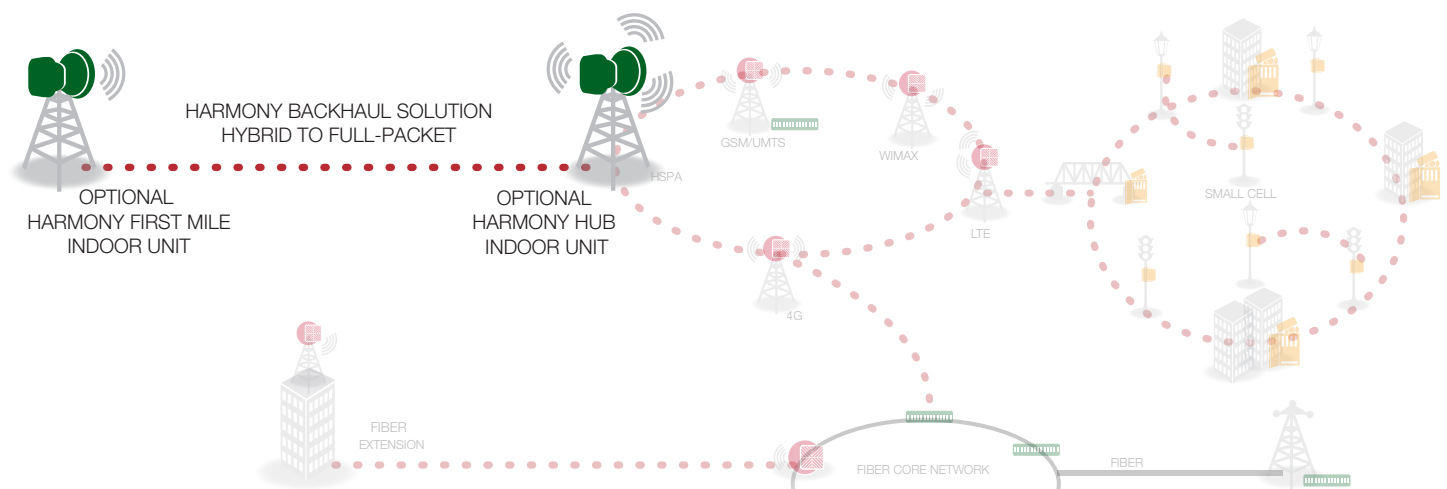

**SWITCHING CAPACITY**

8 Gbps

**ETHERNET PORTS**

4 x 10/100/1000Base-T + 2 x GE SFP ports;  
 RJ-45 connectors (2 ports with embedded power to Harmony Radio)  
 1 local management port + 1 DCN port  
 2 in and 5 out dry contacts

**TDM PORTS**

8 E1/T1 TDM ports; RJ-48C connectors

**SERVICES**

E-Line and E-LAN service  
 E1/T1/J1 CESoPSN (RFC5086)  
 E1 SAToP (RFC4553)

**BRIDGING AND VLAN MANIPULATION**

IEEE 802.1Q bridging  
 MAC table size: 16K  
 Support for Static MAC  
 VLAN insertion and translation

**QUALITY OF SERVICE (QoS)**

Traffic classification and mapping based on port, MAC, VLAN ID, VLAN priority bits, IP address, DSCP, etc.  
 Policing on port, VLAN, and queue  
 8 priority queues per port  
 Scheduler: Strict Priority, WDRR, WRR  
 Congestion Control: sRED  
 Per-port and per-queue traffic shaping

**PERFORMANCE MONITORING**

Packet counters according to RFC2819 RMON MIB, RFC2863  
 Y.1731 performance measurement

**FAULT DETECTION**

Y.1731/802.1ag

**PROTECTION**

xSTP based network protection  
 1+1 hot-standby (HSBY) nodal protection  
 LAG  
 G.8031, G.8032  
 50ms CES 1+1 linear protection

**CLOCK SYNCHRONIZATION**

Differential Clock Recovery (DCR)  
 Synchronous Ethernet with and without SSM  
 Clock sources: Network clock via DCR  
 Line clock from any E1/T1 port  
 Synchronous Ethernet SSM  
 Internal free-run clock

**SUPPORTED ODU CONFIGURATIONS:**

1+0  
 1+1 space diversity/frequency diversity, 1+1 HSBY  
 2+0 FD/XPIC (with load sharing)

**POWER**

Supply: Up to 48V DC  
 Consumption: Min. 15W

**ENVIRONMENTAL**

Operating Temperature Range: -5°C to +55°C / 23°F to 131°F

**DIMENSIONS & WEIGHT**

44.2 cm x 21 cm x 3.2 cm; 1.4 kg  
 16.6" x 8.3" x 1.3"; 3.1 pounds